

Patent Pending

CBM



BALANCE MASTER

Ideal for lifting asymmetric loads!

Achieving **well-balanced lifting** of loads through simple crane operation.

**Designed safety –
chain locks when
load is applied**

*Suitable
for working
load limits
2t, 3t, 5t*

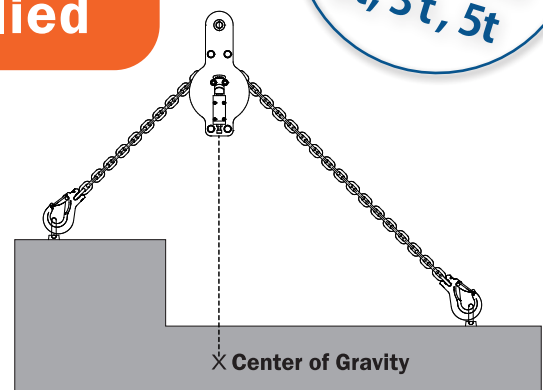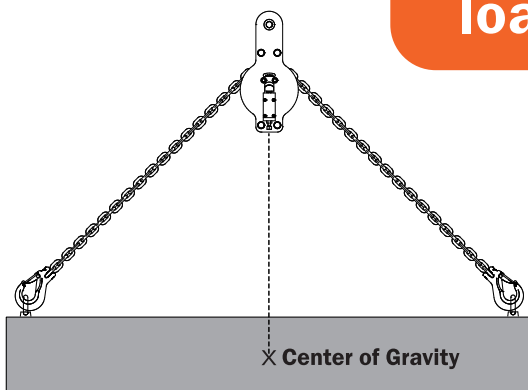

Advantages of BALANCE MASTER CBM



1. Balancing load with simple crane operation, improving work efficiency.
2. The chain locks at the center of gravity – safe, non-slipping design.
3. No need to keep different chain slings for asymmetric loads.

Available Standard Sets

● CBM-EGKNA (Chain length 4 m, Sling Hook EGKNA)

● CBM-GBK (Chain length 4 m, Safety Hook GBK)

* 4 m is the total chain length, not the lifting height.

** Other chain lengths available on request.




Watch Video of
BALANCE MASTER
on YouTube



Set CBM-EGKNA


Specifications

Safety Factor 5:1

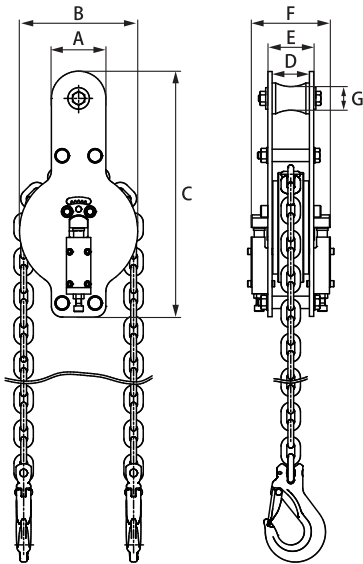


Product Code	Hook	WLL (t)	Chain Diameter (mm)	Dimensions (mm)							Set Weight (kg)
				A	B	C	D	E	F	G	
CBM-EGKNA-8		2.0	8	76	165	343	52	64	110	33	15.6
CBM-EGKNA-10		3.0	10	90	220	425	62	74	132	33	28.3
CBM-EGKNA-13		5.0	13	90	228	442	62	74	132	33	36.6
CBM-GBK-8		2.0	8	76	165	343	52	64	110	33	16.2
CBM-GBK-10		3.0	10	90	220	425	62	74	132	33	28.9
CBM-GBK-13		5.0	13	90	228	442	62	74	132	33	38.0

Warnings



Maximum allowable lifting angle $\alpha_1 + \alpha_2 = 90^\circ$. Lifting angles α_1 and α_2 must not exceed 60° .

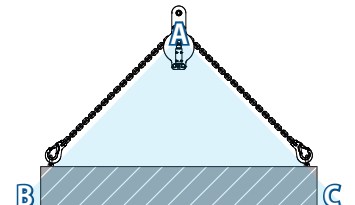

Before lifting, make sure the center of gravity of the load is within the range A, B, and C as shown the diagram above.

Master Link Set

We also offer CBM chain sling sets with master link assembled. Please contact us for further details.



For more Information about our products and how to get in touch with us, please visit our website.

<https://www.martec.co.jp>



MARTEC K.K.

Minatojima-nakamachi 5-1-1, Chuo-ku, Kobe 650-0046

JAPAN

Tel +81-(0)78-302-0460 / Fax +81-(0)78-302-1404

E-mail: info@martec.co.jp

Sales Partner: