

# MI HOOK

## MI type

Sling hook type

## MI-B type

Locking hook type

Shuts out stray current generated by welding operations

# Up to 1000V

(JIS C 3404 considerable)

### Safe welding while lifting

Built-in insulator allows for safe welding operations while lifting welded items. Prevents wire strand breakage and motor burnout on crane wires!

*Note: MI does not include a radio interference prevention function.*

Prevents electric shock and leakage just by hanging on a crane hook!

※ Please check the dimensions of the crane hook and master link.


### MI is available in sizes 3t to 15t

can be used on a large crane hook of a few tens of WLL!



MI Hooks  
YouTube

# Features and Specifications of MI Hooks

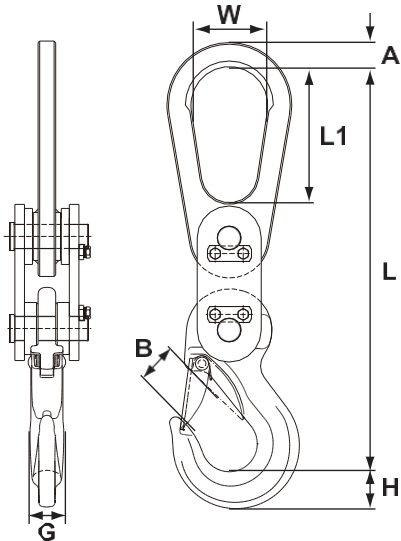

- **Electrical insulating capacity: 1000V**

→ Prevents electric shock and leakage.

*NOTE: This device does not include a radio interference prevention function.*

- **WLL (Working load limit): 3.0t ~ 15.0t**

→ The first 15t-rated insulated hook in Japan.

- **High-Quality Swedish-Made Hook**

→ "Strong, tough, and tenacious" for safe use.

→ you can choose "Sling hook" or "Self-Locking hook"

Type	Hook	WLL (t)	Dimensions(mm)							Weight(kg)
			W	A	L1	L	B	H	G	
MI-3	Sling Hook	3.0	80	22	150	428	42	38	28	6.8
MI-5		5.0	96	30	170	506	52	47	36	12.3
MI-10		10.0	110	40	200	664	73	67	43	28.5
MI-15		15.0	150	42	250	748	82	75	51	37.1
MI-3B	Locking Hook	3.0	80	22	150	469	55	39	30	7.8
MI-5B		5.0	96	30	170	557	62	48	37	14.0
MI-10B		10.0	110	40	200	712	80	62	50	31.4
MI-15B		15.0	150	42	250	779	100	68	54	41.4

**Please contact us if you have any questions about lifting products other than MI hooks**



Chain Slings



Lifting clamps



Load cells



Rotating eye bolt



**MARTEC K.K.**

Minatojima-nakamachi 5-1-1, Chuo-ku, Kobe 650-0046

JAPAN

Tel +81-(0)78-302-0460 / Fax +81-(0)78-302-1404

E-mail: info@martec.co.jp

Sales Partner: