

Patent Pending



CBM

BALANCE MASTER

Ideal for lifting asymmetric loads!

Achieving **well-balanced lifting** of loads through simple crane operation.

Designed safety –
chain locks when
load is applied

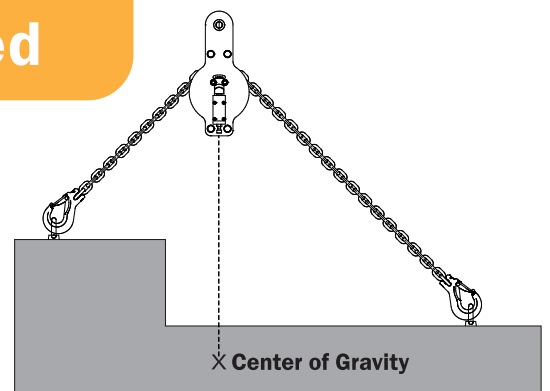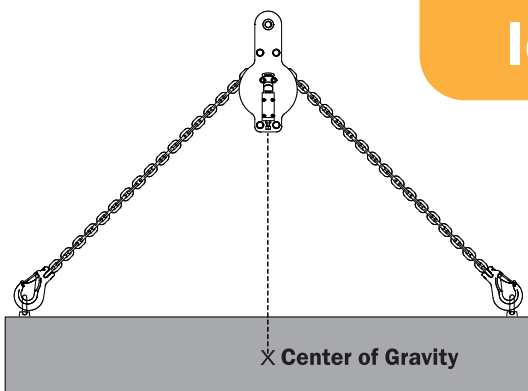

Advantages of BALANCE MASTER CBM



1. Balancing load with simple crane operation, improving work efficiency.
2. The chain locks at the center of gravity – safe, non-slipping design.
3. No need to keep different chain slings for asymmetric loads.



Watch Video of
BALANCE MASTER
on YouTube

Available Standard Sets

- CBM-EGKNA-8 (Chain length 4 m, Sling Hook EGKNA-8)
- CBM-GBK-8 (Chain length 4 m, Safety Hook GBK-8)


* 4m is the total chain length, not the lifting height.
** Other chain lengths available on request.



Set CBM-EGKNA-8


Specifications

Safety Factor 5:1

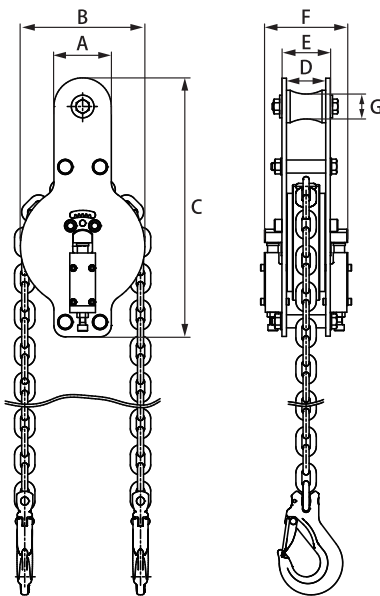


Product Code	Hook	WLL (t)	Chain Diameter (mm)	Dimensions (mm)							Set Weight (kg)
				A	B	C	D	E	F	G	
CBM-EGKNA-8		2.0	8	76	165	343	52	64	110	33	15.6
CBM-GBK-8											16.2

Warning

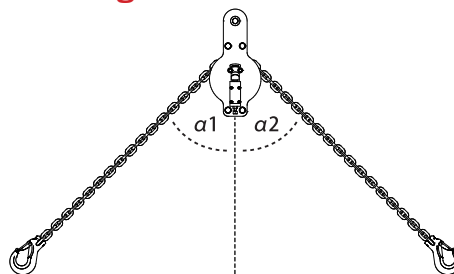

- Maximum allowable lifting angle $\alpha_1 + \alpha_2 = 90^\circ$.
- Lifting angles α_1 and α_2 must not exceed 60° .

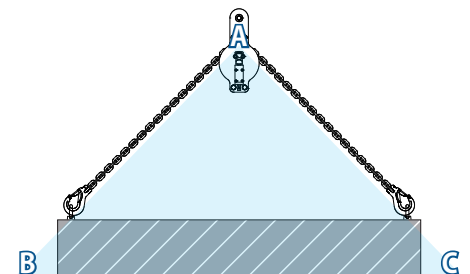

- Before lifting, make sure the center of gravity of the load is within the range A, B, and C as shown the diagram above.

For more Information about our products and how to get in touch with us, please visit our website.

www.martec.co.jp



MARTEC K.K.

Minatojima-Nakamachi 5-1-1, Chuo-ku, Kobe 650-0046

JAPAN

Tel +81-(0)78-302-0460 / Fax +81-(0)78-302-1404

E-mail: info@martec.co.jp

Sales Partner: