


Be a Sling Master  
with this chain  
sling set!


# SLING MASTER



Can work as 1~4 leg slings!

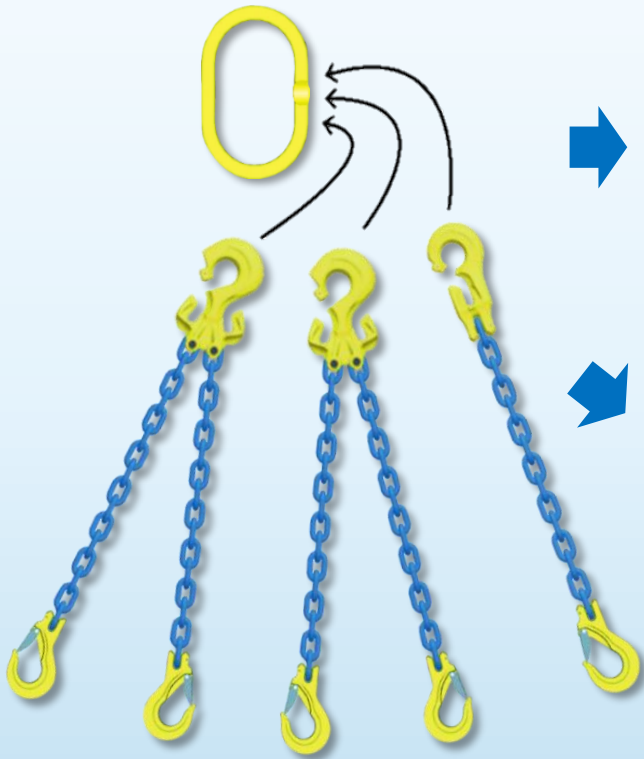

Very versatile to use asymmetric load!

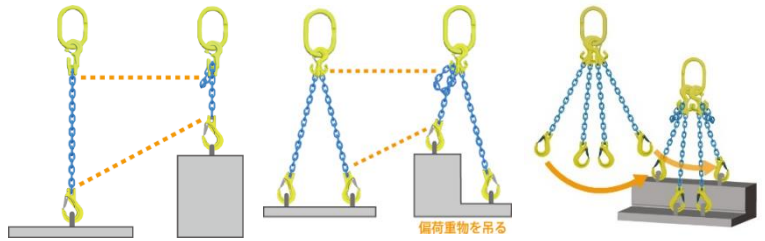

## 【 Features 】


### ① Instant leg change

you can change the number of chain legs without any tools on site!

【SLING MASTER】



【 Others 】

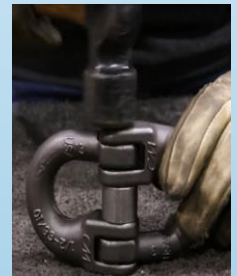

### ② Built-in shortening pocket

You can change the chain length in 1-link increments, simply by hanging the chain over the shortening pocket!

【 How to change chain length 】



【SLING MASTER】



【 Others 】



### ③ Light weight, easy to use

SLING MASTER : 3parts    6.0kg  
Existing Product : 13parts    12.2kg

# How to Choose SLING MASTER SET



① Choose chain size

...**6mm** : 1.1t~2.3t    **8mm** : 2.0t~4.2t

② Choose chain length

... Standard chain length : **2m**

③ Choose the type of hook

**GBK**  
**Gliplatch**  
**Hook**



**EGKNA**  
**Sling**  
**Hook**



Safety locking hooks with disposal standards at a glance. No connection hardware required!


Sling hook with thick-walled, robust spring latch! No connection hardware required!

It comes in a box.  
Easy to store,  
easy to carry!



Set Model	Hooks	Chain	Working Load Limit※ (Lifting Angle within 90° )		
			1-leg	2-leg	3/4-leg
TT-SB2	GBK	6mm	1.1t	1.5t	2.3t
TT-MB2		8mm	2.0t	2.8t	4.2t
TT-SE2	EGKNA	6mm	1.1t	1.5t	2.3t
TT-ME2		8mm	2.0t	2.8t	4.2t

- ※For unequally loaded chain slings, the following is recommended:
- A two-legged system is treated as a single-legged system.
- A three- or four-legged system is treated as a two-legged (or single-legged) system

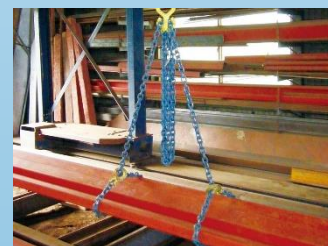

**MARTEC K.K.**

Minatojima-nakamachi 5-1-1, Chuo-ku, Kobe 650-0046

JAPAN

Tel +81-(0)78-302-0460 / Fax +81-(0)78-302-1404

E-mail: info@martec.co.jp

Sales Partner: